



526-8708-030

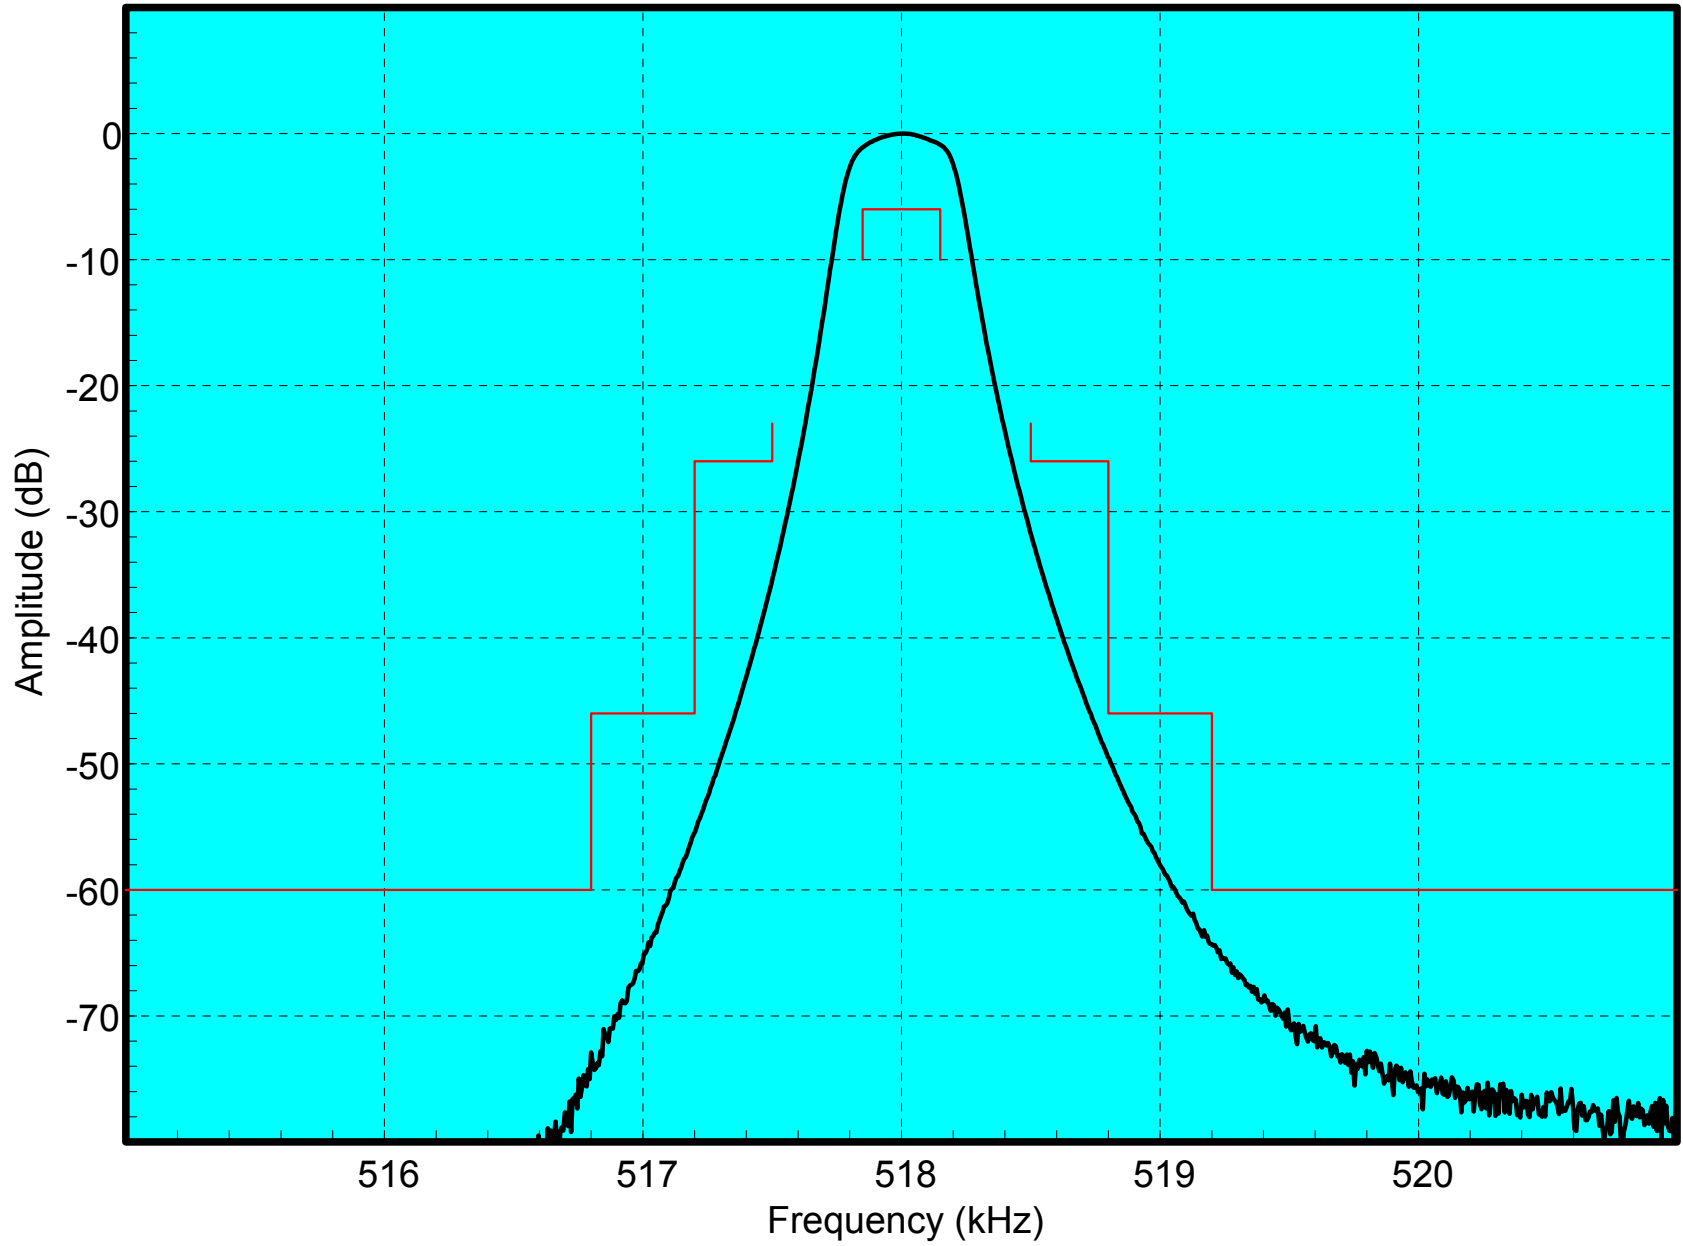

Passband

526-8708-030

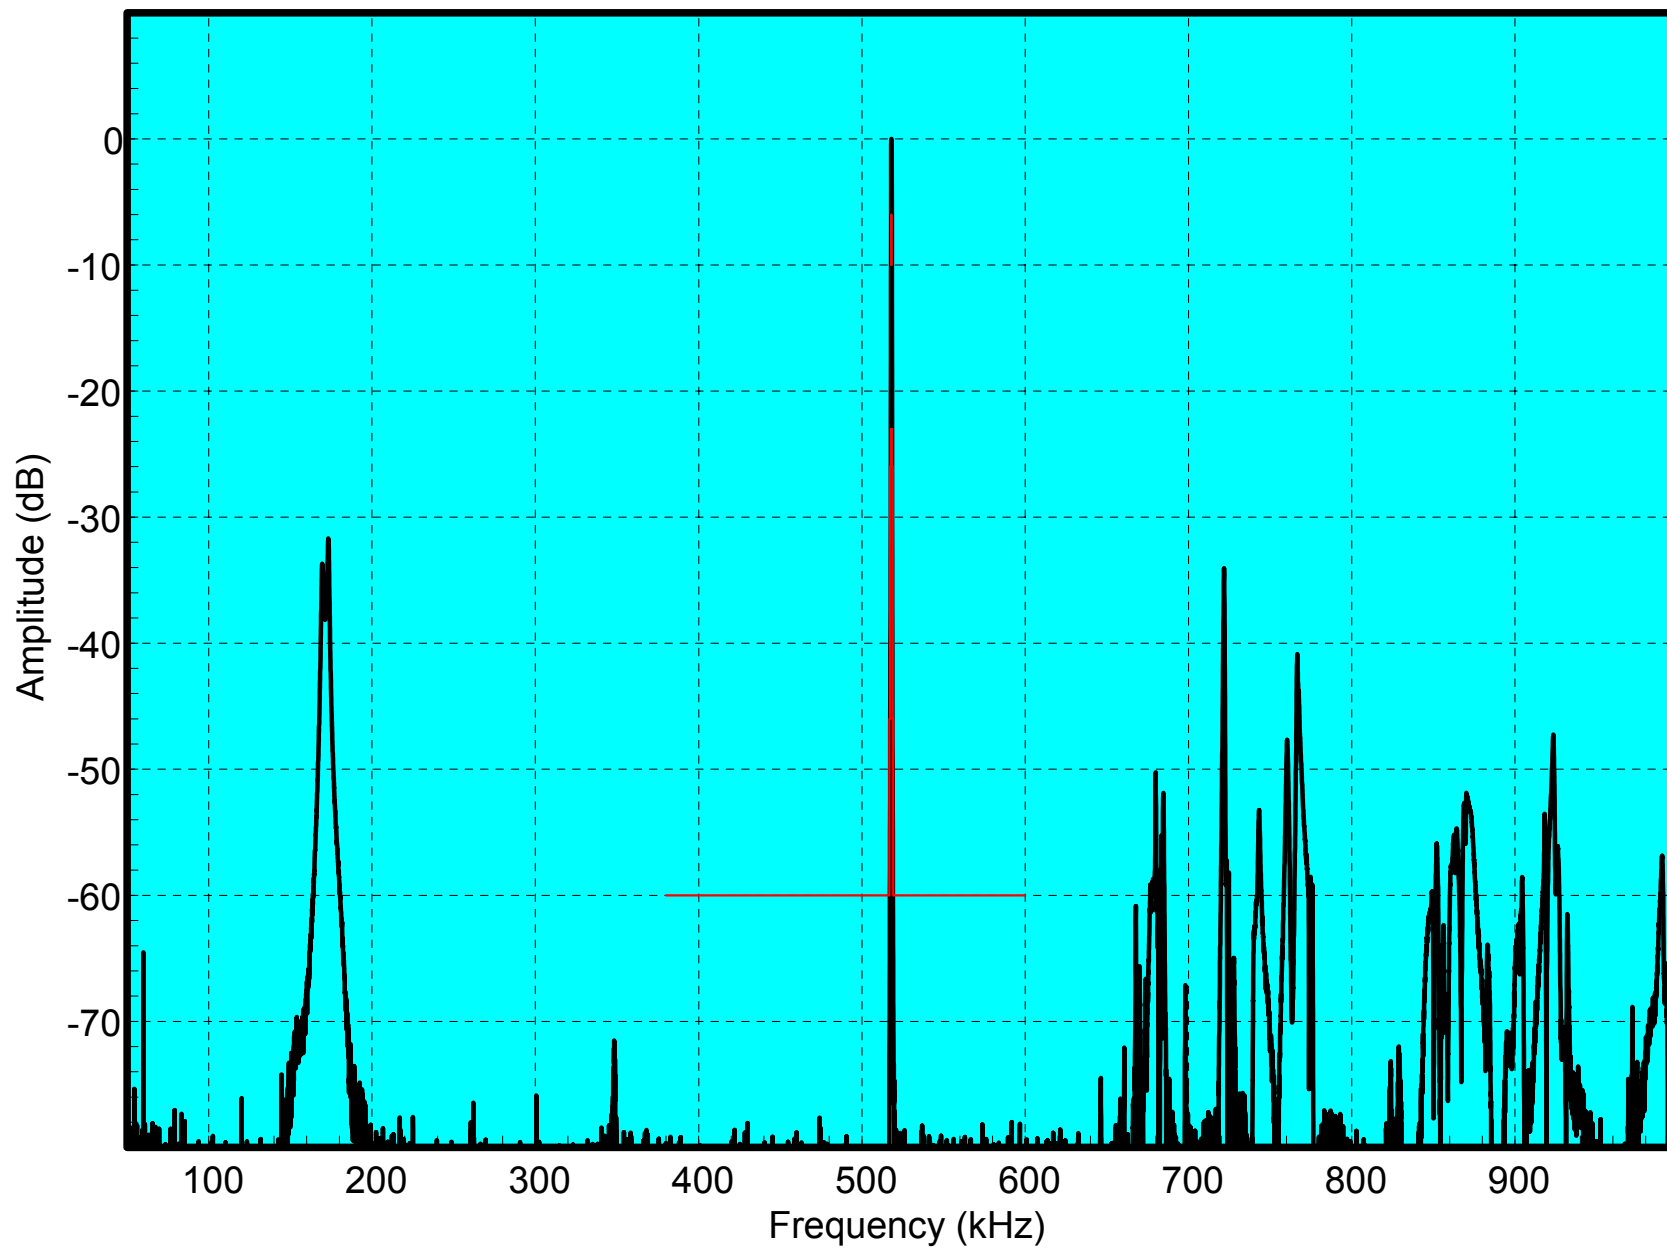

Spurious Response

526-8708-030 Specification

ELECTRICAL CHARACTERISTICS	-20°C TO +65°C		TYPICAL (20°C)
	VALUE	TOLERANCE	
CENTER FREQUENCY	518 kHz	nom	518 kHz
BANDWIDTHS F3H - F3L	0.300 kHz	min	0.50 kHz
PASSBAND RIPPLE	2.0 dB	max	0.2 dB
INSERTION LOSS	8.0 dB	max	2.5 dB
STOPBAND 380 kHz to F60L	60 dB	min	68 dB
F60H to 600 kHz	60 dB	min	77 dB
FREQUENCY SELECTIVITY POINTS			
F60L	516.80 kHz	min	517.03kHz
F46L	517.20 kHz	min	517.33 kHz
F26L	517.50 kHz	min	517.59 kHz
F6L	517.85 kHz	max	517.75kHz
F6H	518.15 kHz	min	518.25 kHz
F26H	518.50 kHz	max	518.41 kHz
F46H	518.80 kHz	max	518.65 kHz
F60H	519.20 kHz	max	519.10 kHz

Test Circuit

