



526-8749-010

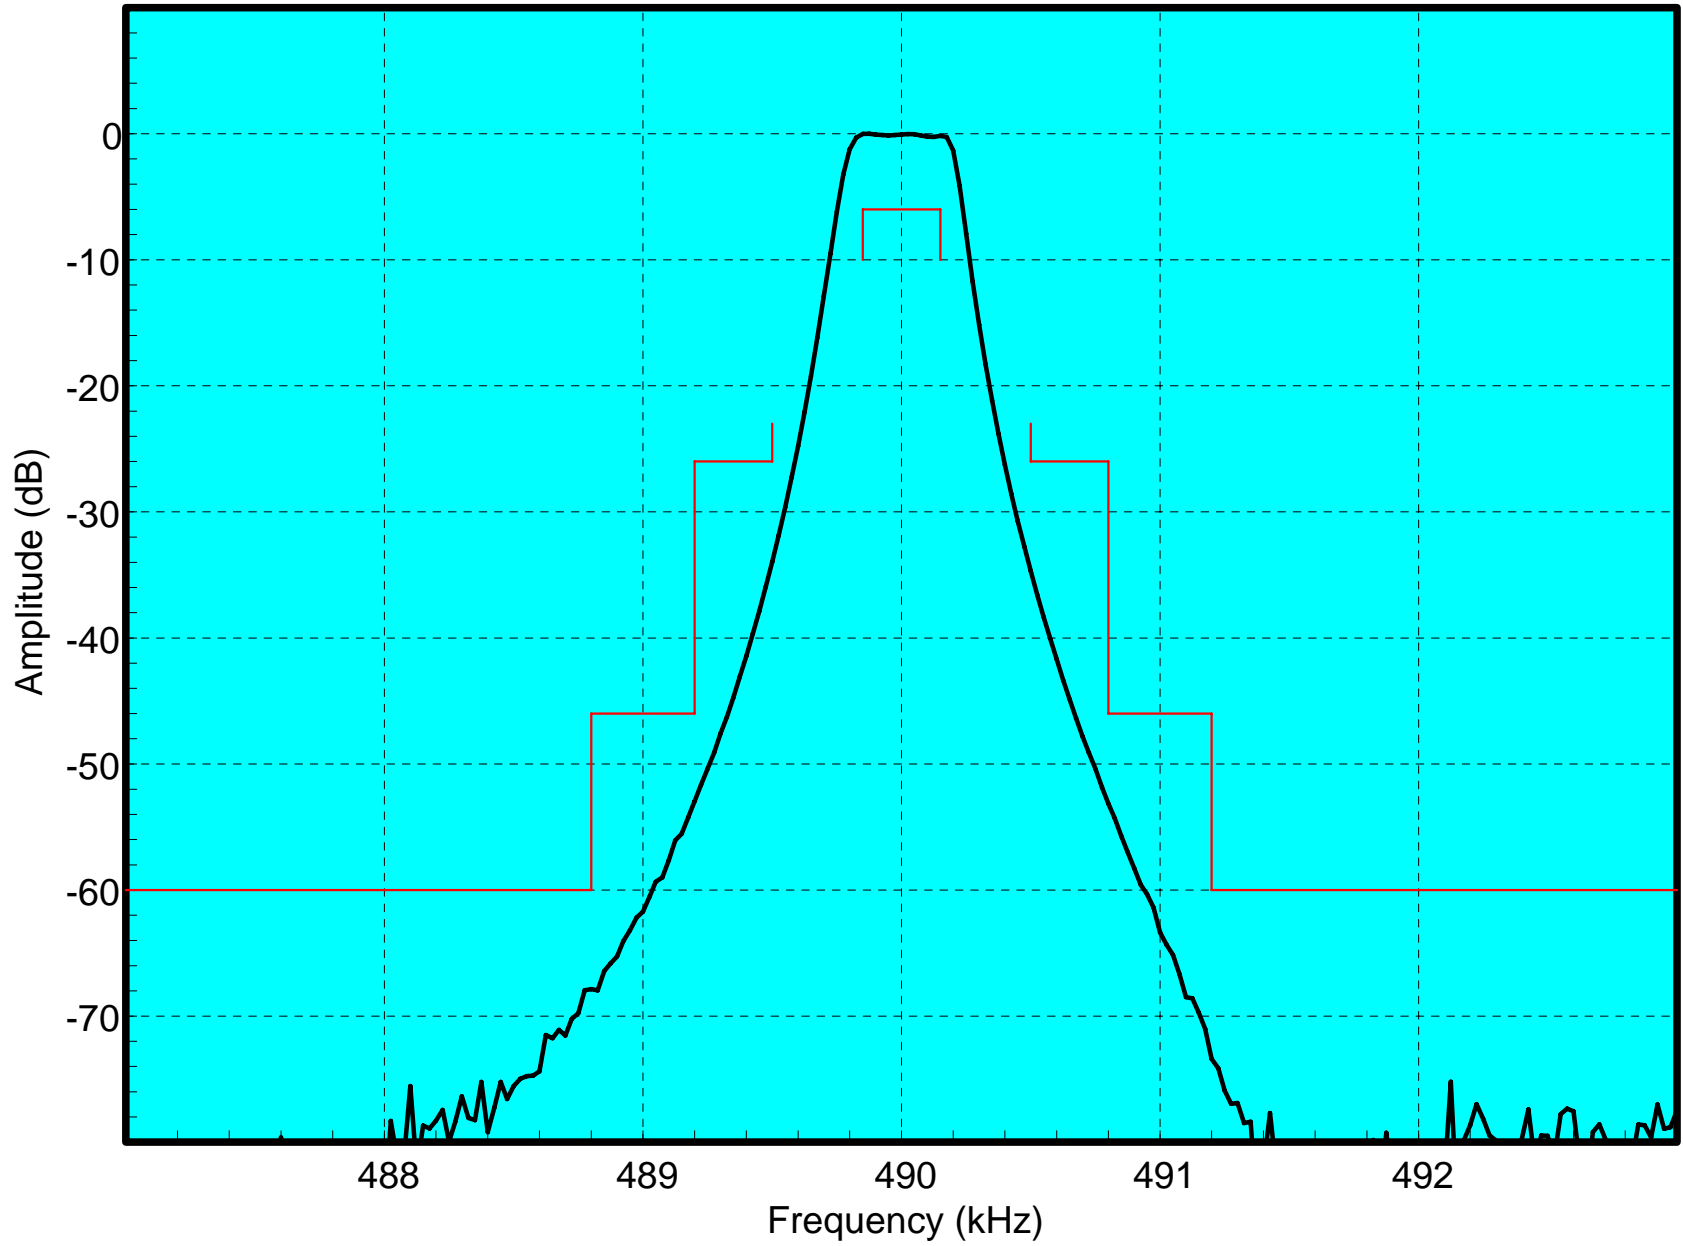

Passband


526-8749-010

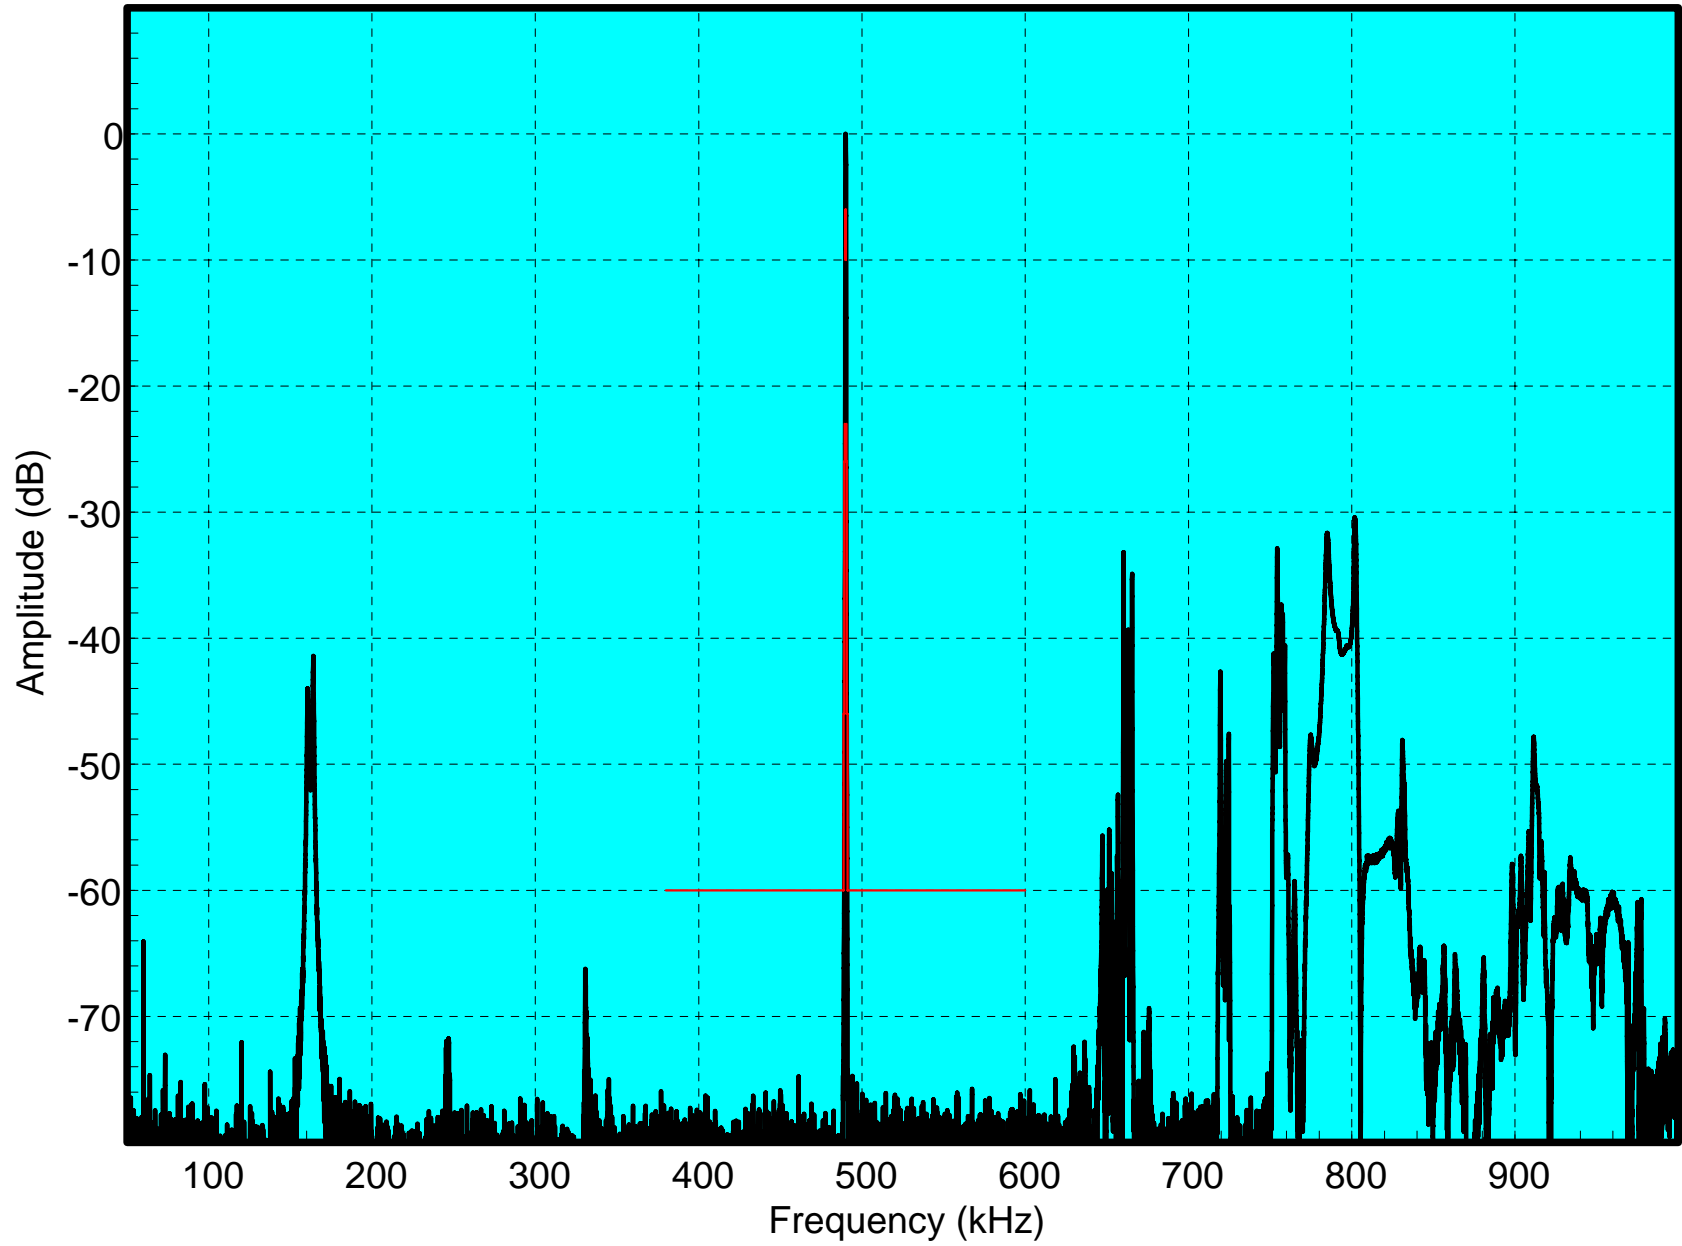

Spurious Response

Ref. 2301 usec

526-8749-010

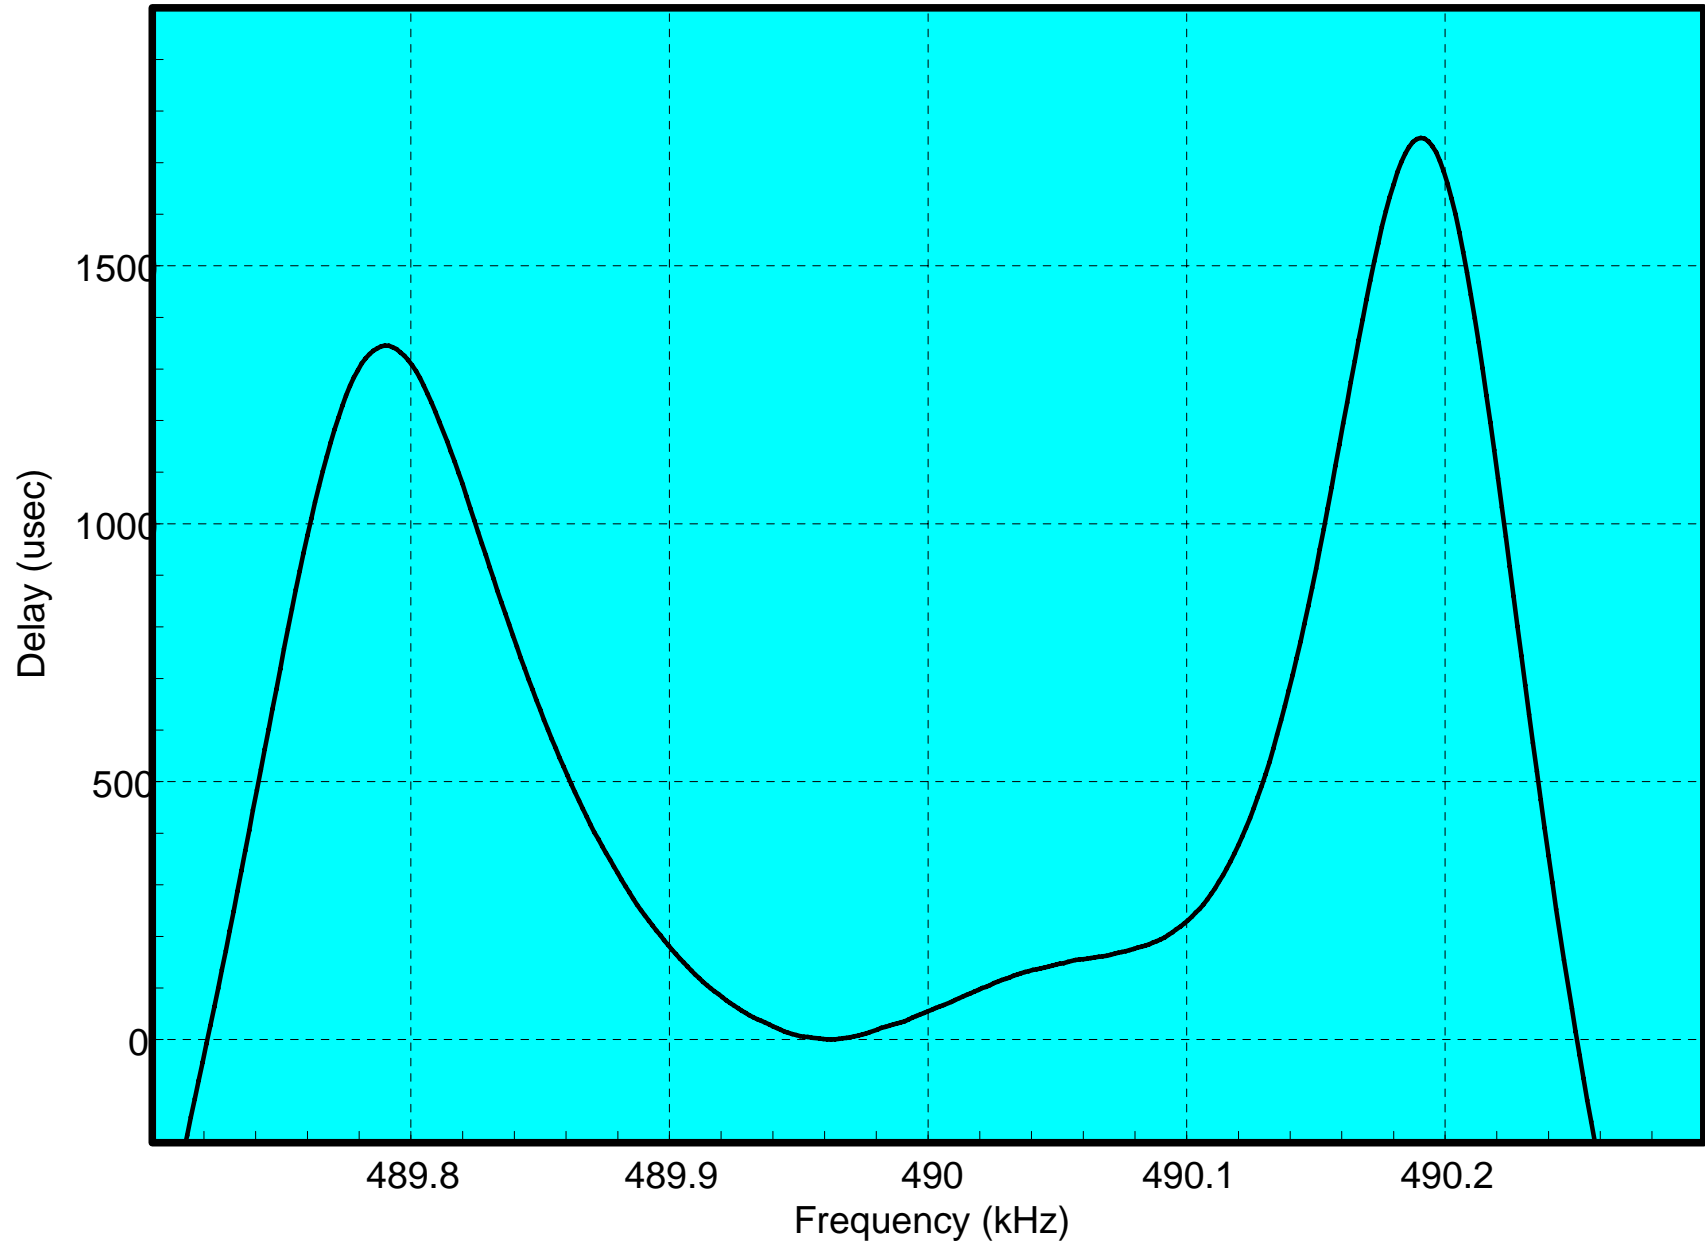

Delay Response

526-8749-010 Specification

ELECTRICAL CHARACTERISTICS	-20°C TO +65°C		TYPICAL (20°C)
	VALUE	TOLERANCE	
CENTER FREQUENCY	490 kHz	nom	490 kHz
BANDWIDTH (6 dB)	0.400 kHz	typ	0.50 kHz
PASSBAND RIPPLE	2.0 dB	max	0.2 dB
INSERTION LOSS	8.0 dB	max	2.5 dB
STOPBAND			
380 kHz to F60L	60 dB	min	68 dB
F60H to 600 kHz	60 dB	min	77 dB
FREQUENCY SELECTIVITY POINTS			
F60L	488.80 kHz	min	489.03kHz
F46L	489.20 kHz	min	489.33 kHz
F26L	489.50 kHz	min	489.59 kHz
F6L	489.85 kHz	max	489.75kHz
F6H	490.15 kHz	min	490.25 kHz
F26H	490.50 kHz	max	490.41 kHz
F46H	490.80 kHz	max	490.65 kHz
F60H	491.20 kHz	max	491.10 kHz

Test Circuit

